



View from Bottom side (Scale 1:1)

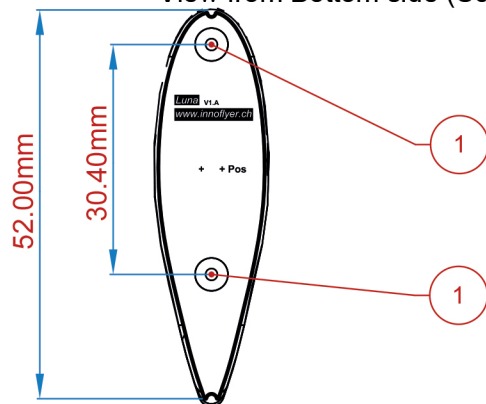


View from Top side (Scale 1:1)

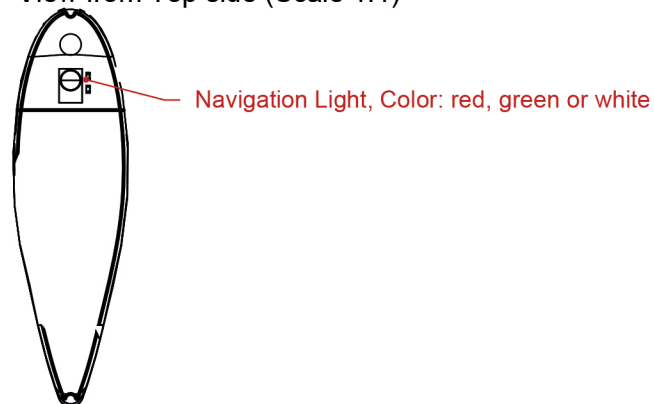

View from Right side (Scale 1:1)



View from Front side (Scale 1:1)

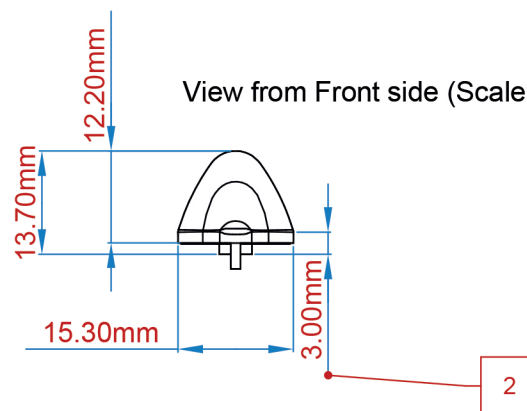

Notes:

- ① M2 thread for installation and thermal coupling
- ② Respect max. thread depth of 3mm
3. Avoid bending the cable too sharply when laying it out
4. Max. LED current: 200mA
Use Light Driver 5.0 in P&P and MLT Mode for higher LED currents

Lena	Version: V1.0	innoflyer Weissensteinstr. 81 4500 Solothurn Switzerland	innoflyer www.innoflyer.ch
Product Specification	Size: A4		
File: Luna.PCBDwf		Name: Christoph Raible	Date: 04.05.2017